

Revolving Stainless Steel-Handles

SPECIFICATION

Stainless Steel **NI**

- AISI 303
- matt, shot-blasted

Spindle


Stainless Steel AISI 303

INFORMATION

Typical in design are the revolving handles GN 798.1 with their stepped shape consisting of two cylinders giving the operator a better grip.

TECHNICAL INFORMATION

- Stainless Steel characteristics (see page A26)

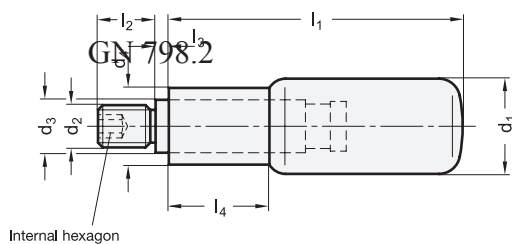

GN 798.1

STAINLESS STEEL

Description	d1	d2	d3	d4	l1	l2	l3	≈	l4	△
GN 798.1-NI-18-M6	18	M 6	10	14.5	56	13	2.5	19	95	
GN 798.1-NI-18-M8	18	M 8	10	14.5	56	13	2.5	19	97	
GN 798.1-NI-22-M8	22	M 8	14	18.5	59	14	2.5	21	163	
GN 798.1-NI-22-M10	22	M 10	14	18.5	59	14	2.5	21	165	
GN 798.1-NI-24-M8	24	M 8	14	18.5	74	16	2.5	27	210	
GN 798.1-NI-24-M10	24	M 10	14	18.5	74	16	2.5	27	212	

Cylindrical Revolving handles

Spindle Steel, zinc plated / with female

SPECIFICATION

Plastic **KT**

Technopolymer (Polyamide PA)

- temperature resistant up to 90 °C
- black, matt finish

Spindle Steel


zinc plated, blue passivated

INFORMATION

Typical in design are the revolving handles GN 798.2 with their stepped shape consisting of two cylinders giving the operator a better grip.

TECHNICAL INFORMATION

- Plastic characteristics (see page A2)

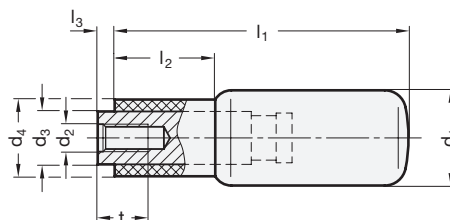

GN 798.2

Description	d1	d2	d3	d4	l1	l2	l3	t	△
GN 798.2-KT-16-M5	16	M 5	10	13	41.5	12	2.5	10	20
GN 798.2-KT-18-M5	18	M 5	10	14.5	56	13	2.5	10	28
GN 798.2-KT-22-M6	22	M 6	14	18.5	59	14	2.5	12	75
GN 798.2-KT-24-M6	24	M 6	14	18.5	74	16	2.5	12	86
GN 798.2-KT-25-M8	25	M 8	16	20	84	16	2.5	14	116