

Ratchet spanner

SPECIFICATION

Housing
Steel
plastic coated
black matt, textured finish

Shaft
Stainless Steel AISI 303
matt shot-blasted

Wearing parts hardened

Domes gear knobs I.222 N (see page 537)
Plastic, Duroplast
black, shiny finish

INFORMATION

Ratchet spanners GN 316 are well designed of robust construction and simple to use.

To exchange the inserts remove screw and cover. They are, however, also practical for fixed applications on any machinery and equipment. For example for assembly and repair work. The inserts are easily interchanged and can be supplied individually.

ON REQUEST


- other inserts

TECHNICAL INFORMATION

- Square DIN 79 (see page A16)
- ISO-Fundamental Tolerances (see page A21)

Function

In order to reverse the operation of this spanner move the cam lever from its middle position either to the left or the right to obtain the function required. In the middle position the ratchet function is eliminated and the spanner can be used in both directions as an ordinary spanner.

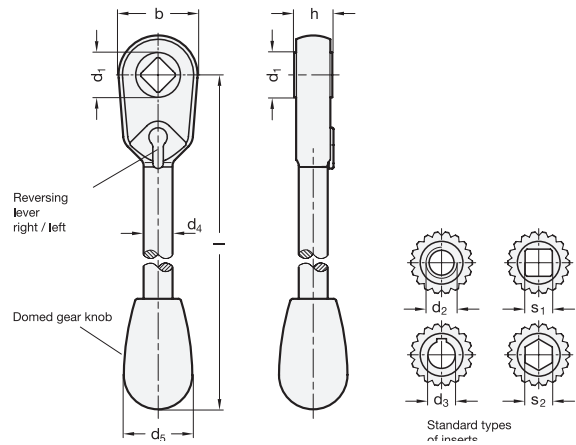

GN 316

Description	d1	d2	d3 H7	s1	s2	b	d4	d5	h	l	Max. torque in Nm	
GN 316-12-M8	12	M 8	-	-	-	22	9	20	11	118	40	88
GN 316-12-V8	12	-	-	V 8	-	22	9	20	11	118	40	87
GN 316-17-K10	17	-	K 10	-	-	30	11	26	14	156	70	194
GN 316-17-K12	17	-	K 12	-	-	30	11	26	14	156	70	200
GN 316-17-M10	17	M 10	-	-	-	30	11	26	14	156	70	190
GN 316-17-M12	17	M 12	-	-	-	30	11	26	14	156	70	180
GN 316-17-SK12	17	-	-	-	SK 12*	30	11	26	14	156	70	189
GN 316-17-V10	17	-	-	V 10	-	30	11	26	14	156	70	191
GN 316-22-K14	22	-	K 14	-	-	39.5	14	33	17	187	130	420
GN 316-22-K16	22	-	K 16	-	-	39.5	14	33	17	187	130	375
GN 316-22-M14	22	M 14*	-	-	-	39.5	14	33	17	187	130	97
GN 316-22-M16	22	M 16	-	-	-	39.5	14	33	17	187	130	380
GN 316-22-SK14	22	-	-	-	SK 14*	39.5	14	33	17	187	130	380
GN 316-22-V12	22	-	-	V 12	-	39.5	14	33	17	187	130	380
GN 316-22-V14	22	-	-	V 14	-	39.5	14	33	17	187	130	360
GN 316-26-K18	26	-	K 18	-	-	46	17	33	22	219	180	610
GN 316-26-M20	26	M 20	-	-	-	46	17	33	22	219	180	600
GN 316-26-SK17	26	-	-	-	SK 17*	46	17	33	22	219	180	600
GN 316-26-V17	26	-	-	V 17	-	46	17	33	22	219	180	605

* not available from stock, requires a minimum order quantity.